

SEWAGE LIFTING PUMP MINI SEWAGE LIFTING STATION



APPLICATIONS


Designed for collecting and lifting wastewater from below sewer level. Suitable for use in:

- Basements of residential buildings
- Underground garages
- Small commercial buildings
- Home additions
- Kitchens, laundry rooms and utility rooms
- Bathroom and shower rooms below sewer level
- Sump pits, wine cellars and bars
- Condensate from air conditioning systems
- Any locations without gravity drainage to the main sewer line


FEATURES

- Compact sewage lifting station, ideal for small spaces.
- Suitable for wastewater with or without feces.
- High-quality materials, corrosion-resistant and durable.
- Equipped with an automatic control system.
- Optional with wireless alarm (WiFi) for remote monitoring.
- Multiple inlets to meet various installation needs.
- High performance vortex impeller with large passage, capable of handling solid particles and long-fiber impurities.
- Multiple inlet connections, easy installation and maintenance.
- Fully sealed and leak-proof design to effectively prevent odor and water leakage.
- Low noise, energy saving and high efficiency.
- Built-in non-return valve to prevent backflow.
- Automatic start/stop with intelligent control to protect the pump.
- Max. ambient temperature: 40°C.
- Max. liquid temperature: 60°C.
- Protection rating: IPX8.

DIMENSIONS

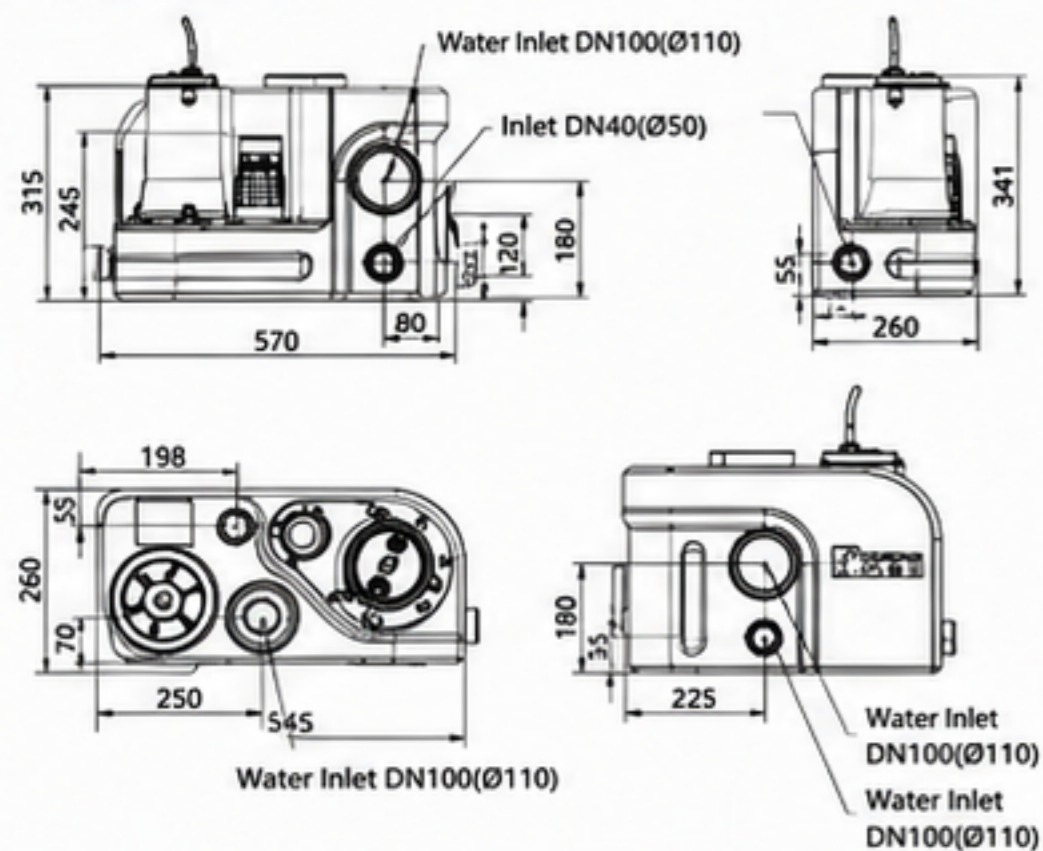

PERFORMANCE CURVE

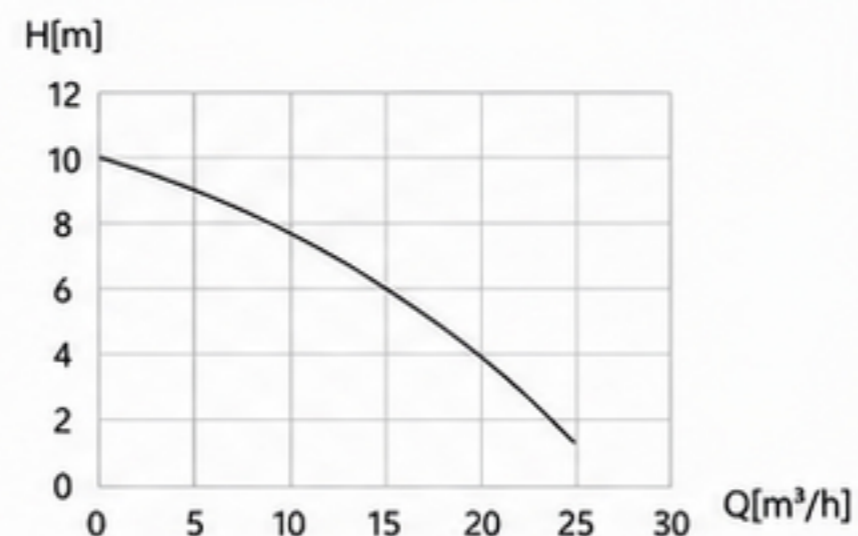

1.1KW



Max. Flow Rate: 20m³/h

Voltage: 220V

Current: 5.2A

Max. Head: 10m

Inlet Diameter: 25mm

Rated Head: 9m

Power: 1.1KW

Outlet Diameter: DN40

Rated Flow Rate: 6m³/h



Easy Installation



Environmental Protection



Corrosion Resistant



Low Noise